

N6033 Bullet Network Camera



3 Megapixel / H.264 / 1080P Real-Time / D-WDR / Auto-IRIS

- 3 Megapixel 1/4" CMOS Sensor in High Resolution
- H.264/MJPEG Dual Codec & Streaming simultaneously
- Vari-Focal Lens 3-10mm F1.6
- QXGA (2048x1536@22fps) / 1080P(1920x1080@30fps)
- Digital I/O for External Sensor and Alarm
- Mechanical ICR
- Built-in IR Illuminator
- Auto-IRIS
- Digital Powerful WDR
- 3D Noise Reduction
- 2 Way Audio Supported
- Intelligent Video Analytics
- PoE Power Over Ethernet IEEE802.3af (Option)
- Micro SD Card Supported (SDHC up to 32GB)
- IP68 Water+Vandal Proof




Specifications

<div data-bbox="121 622 734 660"> <p>Camera</p> </div> <div data-bbox="167 660 829 936"> <table border="0"> <tr><td>Sensor</td><td>3 Mega Pixel 1/4" CMOS sensor</td></tr> <tr><td>Scan Method</td><td>Progressive</td></tr> <tr><td>Lens</td><td>Vari-Focal Lens 3-10mm F1.6</td></tr> <tr><td>Number of Effective Pixel (H*V)</td><td>2048x1536</td></tr> <tr><td>Minimum Illumination</td><td>0.1Lux (F1.6, AGC max.)0Lux (IR On)</td></tr> <tr><td>Horizontal Resolution</td><td>1400TVL</td></tr> <tr><td>Wide Dynamic Range</td><td>High/Middle/Low, 3 steps selection</td></tr> <tr><td>Dynamic Range</td><td>69db@8xGain</td></tr> <tr><td>SNR(max)</td><td>37db</td></tr> <tr><td>DNR</td><td>High/Middle/Low, 3 steps selection</td></tr> <tr><td>White Balance</td><td>Auto</td></tr> <tr><td>Gain Control</td><td>High/Middle/Low, 3 steps selection</td></tr> <tr><td>Flicker Control</td><td>Off/50Hz/60Hz, 3 steps selection</td></tr> <tr><td>Electronic Shutter</td><td>Auto/Manual (1/30, 1/100, 1/500, 1/1000, 1/2000, 1/5000, 1/10000)</td></tr> <tr><td>IRIS Control</td><td>Auto</td></tr> </table> </div> <div data-bbox="121 940 734 974"> <p>IR Illuminators</p> </div> <div data-bbox="167 974 734 1064"> <table border="0"> <tr><td>Wavelength Range</td><td>850nm</td></tr> <tr><td>Distance</td><td>25M</td></tr> <tr><td>Day and Night</td><td>IR-Cut Filter Removable (ICR)</td></tr> <tr><td>Beam Angle</td><td>30°</td></tr> </table> </div> <div data-bbox="121 1064 734 1097"> <p>Video</p> </div> <div data-bbox="167 1097 734 1265"> <table border="0"> <tr><td>Video Compression</td><td>H.264 (MPEG-4Part 10/AVC)/MJPEG,Dual codec</td></tr> <tr><td>Video framerate</td><td>2048x1536@22fps/1920x1080@30fps</td></tr> <tr><td>Resolution</td><td>H.264 : 3M(2048x1536@22fps) 2M(1600x1200@22fps) 1080P(1920x1080@30fps) 720P(1280x720@30fps) MJPEG : 1.3M(1280x960@15fps) 1080P(1920x1080@15fps) 720P(1280x720@15fps)</td></tr> </table> </div> <div data-bbox="167 1265 734 1377"> <table border="0"> <tr><td>Bitrate control</td><td>CBR and VBR, 128kbps~8Mbps</td></tr> <tr><td>Multi-streams</td><td>Dual streaming, Multiple profiles 1920x1080 H.264@30fps/720x400 H.264(Sub) @30fps/1920x1080 MJPEG@15fps 2048x1536 H.264@22fps/640x480 H.264(Sub) @22fps/1280x960 MJPEG@15fps</td></tr> </table> </div> <div data-bbox="167 1377 734 1422"> <table border="0"> <tr><td>Digital Zoom</td><td>1/4X, 1/3X, 1/2X, 1X, 2X, 4X</td></tr> <tr><td>Image Rotation (PC side)</td><td>Mirror, Flip, Rotate 180°</td></tr> </table> </div> <div data-bbox="121 1422 734 1456"> <p>Intelligent Video</p> </div> <div data-bbox="167 1456 734 1534"> <table border="0"> <tr><td>De-Noise</td><td>Yes</td></tr> <tr><td>Motion Detection</td><td>Yes</td></tr> <tr><td>Blind Detection</td><td>Yes</td></tr> <tr><td>Privacy Mask</td><td>Yes</td></tr> </table> </div> <div data-bbox="121 1534 734 1568"> <p>Panning/Tilting</p> </div> <div data-bbox="167 1568 734 1601"> <table border="0"> <tr><td>Number of the preset positions</td><td>16</td></tr> </table> </div> <div data-bbox="121 1601 734 1635"> <p>Audio</p> </div> <div data-bbox="167 1635 734 1709"> <table border="0"> <tr><td>2 Way Audio</td><td>Audio microphone in, Audio Line-out</td></tr> <tr><td>Compression</td><td>AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate</td></tr> </table> </div>	Sensor	3 Mega Pixel 1/4" CMOS sensor	Scan Method	Progressive	Lens	Vari-Focal Lens 3-10mm F1.6	Number of Effective Pixel (H*V)	2048x1536	Minimum Illumination	0.1Lux (F1.6, AGC max.)0Lux (IR On)	Horizontal Resolution	1400TVL	Wide Dynamic Range	High/Middle/Low, 3 steps selection	Dynamic Range	69db@8xGain	SNR(max)	37db	DNR	High/Middle/Low, 3 steps selection	White Balance	Auto	Gain Control	High/Middle/Low, 3 steps selection	Flicker Control	Off/50Hz/60Hz, 3 steps selection	Electronic Shutter	Auto/Manual (1/30, 1/100, 1/500, 1/1000, 1/2000, 1/5000, 1/10000)	IRIS Control	Auto	Wavelength Range	850nm	Distance	25M	Day and Night	IR-Cut Filter Removable (ICR)	Beam Angle	30°	Video Compression	H.264 (MPEG-4Part 10/AVC)/MJPEG,Dual codec	Video framerate	2048x1536@22fps/1920x1080@30fps	Resolution	H.264 : 3M(2048x1536@22fps) 2M(1600x1200@22fps) 1080P(1920x1080@30fps) 720P(1280x720@30fps) MJPEG : 1.3M(1280x960@15fps) 1080P(1920x1080@15fps) 720P(1280x720@15fps)	Bitrate control	CBR and VBR, 128kbps~8Mbps	Multi-streams	Dual streaming, Multiple profiles 1920x1080 H.264@30fps/720x400 H.264(Sub) @30fps/1920x1080 MJPEG@15fps 2048x1536 H.264@22fps/640x480 H.264(Sub) @22fps/1280x960 MJPEG@15fps	Digital Zoom	1/4X, 1/3X, 1/2X, 1X, 2X, 4X	Image Rotation (PC side)	Mirror, Flip, Rotate 180°	De-Noise	Yes	Motion Detection	Yes	Blind Detection	Yes	Privacy Mask	Yes	Number of the preset positions	16	2 Way Audio	Audio microphone in, Audio Line-out	Compression	AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate	<div data-bbox="861 622 1482 660"> <p>Network</p> </div> <div data-bbox="909 660 1482 784"> <table border="0"> <tr><td>Streaming Protocols</td><td>RTSP/RTP/UDP,RTSP/RTP/TCP,RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG</td></tr> <tr><td>Supported Protocols</td><td>IPv4, IPv6, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF</td></tr> <tr><td>Mobile Surveillance</td><td>iPhone, iPad, Android, BlackBerry</td></tr> </table> </div> <div data-bbox="861 784 1482 817"> <p>Storage</p> </div> <div data-bbox="909 817 1482 851"> <table border="0"> <tr><td>External</td><td>1x Micro SD Card (SDHC up to 32GB)</td></tr> </table> </div> <div data-bbox="861 851 1482 884"> <p>Processors and Memory</p> </div> <div data-bbox="909 884 1482 929"> <table border="0"> <tr><td>CPU</td><td>ARM9 SOC 800MHz</td></tr> <tr><td>Flash and Memory</td><td>16MB NOR flash, 256MB DDRIII</td></tr> </table> </div> <div data-bbox="861 929 1482 963"> <p>I/O and Connectors</p> </div> <div data-bbox="909 963 1482 1041"> <table border="0"> <tr><td>Alarm I/O</td><td>1xAlarm-in (2pin), 1xAlarm-out (3pin)</td></tr> <tr><td>LAN</td><td>1x RJ45 Ethernet connector</td></tr> <tr><td>Audio</td><td>1x Audio microphone in, 1x Audio Line-out</td></tr> </table> </div> <div data-bbox="861 1041 1482 1075"> <p>Software Compatibility</p> </div> <div data-bbox="909 1075 1482 1142"> <table border="0"> <tr><td>Browser</td><td>Internet Explorer 6.0 or above</td></tr> <tr><td>Application Software</td><td>VMS Application Software</td></tr> <tr><td>OS supported</td><td>Microsoft Windows 2000, XP, Vista, Windows 7</td></tr> </table> </div> <div data-bbox="861 1142 1482 1176"> <p>Open API</p> </div> <div data-bbox="909 1176 1482 1220"> <table border="0"> <tr><td></td><td>CGI commands to control camera Media SDK to handle streaming</td></tr> </table> </div> <div data-bbox="861 1220 1482 1254"> <p>Factory Default</p> </div> <div data-bbox="909 1254 1482 1288"> <table border="0"> <tr><td></td><td>Button</td></tr> </table> </div> <div data-bbox="861 1288 1482 1321"> <p>Power</p> </div> <div data-bbox="909 1321 1482 1377"> <table border="0"> <tr><td>Power</td><td>DC 12V</td></tr> <tr><td>Power Consumption</td><td>DC12V/ POE IR On : 7.8W / IR Off : 4.8W</td></tr> </table> </div> <div data-bbox="861 1377 1482 1411"> <p>Dimension</p> </div> <div data-bbox="909 1411 1482 1444"> <table border="0"> <tr><td></td><td>98.59mm(Φ)x98.59mm(H)x254.27mm(L)</td></tr> </table> </div> <div data-bbox="861 1444 1482 1478"> <p>Weight</p> </div> <div data-bbox="909 1478 1482 1512"> <table border="0"> <tr><td></td><td>DC12V : 1251g / PoE : 1275g</td></tr> </table> </div> <div data-bbox="861 1512 1482 1545"> <p>Operating Environment</p> </div> <div data-bbox="909 1545 1482 1601"> <table border="0"> <tr><td>Operating temperature</td><td>-20°C~+50°C</td></tr> <tr><td>Storage temperature</td><td>-30°C~+60°C</td></tr> <tr><td>Humidity</td><td>0% ~ 95% non-condensing</td></tr> </table> </div> <div data-bbox="861 1601 1482 1635"> <p>Certification</p> </div> <div data-bbox="909 1635 1482 1668"> <table border="0"> <tr><td></td><td>CE, FCC Class A, RoHS, IP68</td></tr> </table> </div> <div data-bbox="861 1668 1482 1702"> <p>Warranty</p> </div> <div data-bbox="909 1702 1482 1736"> <table border="0"> <tr><td></td><td>24 months</td></tr> </table> </div>	Streaming Protocols	RTSP/RTP/UDP,RTSP/RTP/TCP,RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG	Supported Protocols	IPv4, IPv6, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF	Mobile Surveillance	iPhone, iPad, Android, BlackBerry	External	1x Micro SD Card (SDHC up to 32GB)	CPU	ARM9 SOC 800MHz	Flash and Memory	16MB NOR flash, 256MB DDRIII	Alarm I/O	1xAlarm-in (2pin), 1xAlarm-out (3pin)	LAN	1x RJ45 Ethernet connector	Audio	1x Audio microphone in, 1x Audio Line-out	Browser	Internet Explorer 6.0 or above	Application Software	VMS Application Software	OS supported	Microsoft Windows 2000, XP, Vista, Windows 7		CGI commands to control camera Media SDK to handle streaming		Button	Power	DC 12V	Power Consumption	DC12V/ POE IR On : 7.8W / IR Off : 4.8W		98.59mm(Φ)x98.59mm(H)x254.27mm(L)		DC12V : 1251g / PoE : 1275g	Operating temperature	-20°C~+50°C	Storage temperature	-30°C~+60°C	Humidity	0% ~ 95% non-condensing		CE, FCC Class A, RoHS, IP68		24 months
Sensor	3 Mega Pixel 1/4" CMOS sensor																																																																																																																
Scan Method	Progressive																																																																																																																
Lens	Vari-Focal Lens 3-10mm F1.6																																																																																																																
Number of Effective Pixel (H*V)	2048x1536																																																																																																																
Minimum Illumination	0.1Lux (F1.6, AGC max.)0Lux (IR On)																																																																																																																
Horizontal Resolution	1400TVL																																																																																																																
Wide Dynamic Range	High/Middle/Low, 3 steps selection																																																																																																																
Dynamic Range	69db@8xGain																																																																																																																
SNR(max)	37db																																																																																																																
DNR	High/Middle/Low, 3 steps selection																																																																																																																
White Balance	Auto																																																																																																																
Gain Control	High/Middle/Low, 3 steps selection																																																																																																																
Flicker Control	Off/50Hz/60Hz, 3 steps selection																																																																																																																
Electronic Shutter	Auto/Manual (1/30, 1/100, 1/500, 1/1000, 1/2000, 1/5000, 1/10000)																																																																																																																
IRIS Control	Auto																																																																																																																
Wavelength Range	850nm																																																																																																																
Distance	25M																																																																																																																
Day and Night	IR-Cut Filter Removable (ICR)																																																																																																																
Beam Angle	30°																																																																																																																
Video Compression	H.264 (MPEG-4Part 10/AVC)/MJPEG,Dual codec																																																																																																																
Video framerate	2048x1536@22fps/1920x1080@30fps																																																																																																																
Resolution	H.264 : 3M(2048x1536@22fps) 2M(1600x1200@22fps) 1080P(1920x1080@30fps) 720P(1280x720@30fps) MJPEG : 1.3M(1280x960@15fps) 1080P(1920x1080@15fps) 720P(1280x720@15fps)																																																																																																																
Bitrate control	CBR and VBR, 128kbps~8Mbps																																																																																																																
Multi-streams	Dual streaming, Multiple profiles 1920x1080 H.264@30fps/720x400 H.264(Sub) @30fps/1920x1080 MJPEG@15fps 2048x1536 H.264@22fps/640x480 H.264(Sub) @22fps/1280x960 MJPEG@15fps																																																																																																																
Digital Zoom	1/4X, 1/3X, 1/2X, 1X, 2X, 4X																																																																																																																
Image Rotation (PC side)	Mirror, Flip, Rotate 180°																																																																																																																
De-Noise	Yes																																																																																																																
Motion Detection	Yes																																																																																																																
Blind Detection	Yes																																																																																																																
Privacy Mask	Yes																																																																																																																
Number of the preset positions	16																																																																																																																
2 Way Audio	Audio microphone in, Audio Line-out																																																																																																																
Compression	AMR, G.711 @ 64kbps, G.726 @ 32kbps/ Configure bit rate																																																																																																																
Streaming Protocols	RTSP/RTP/UDP,RTSP/RTP/TCP,RTSP/RTP/HTTP tunneling, LAN Multicast, Multipart-JPEG																																																																																																																
Supported Protocols	IPv4, IPv6, HTTP, UDP, TCP, ICMP, IGMP, ARP, DHCP, NTP, SMTP, FTP, SAMBA, UPnP, PPPoE, DNS, DDNS, RTSP, RTP, RTCP, ONVIF																																																																																																																
Mobile Surveillance	iPhone, iPad, Android, BlackBerry																																																																																																																
External	1x Micro SD Card (SDHC up to 32GB)																																																																																																																
CPU	ARM9 SOC 800MHz																																																																																																																
Flash and Memory	16MB NOR flash, 256MB DDRIII																																																																																																																
Alarm I/O	1xAlarm-in (2pin), 1xAlarm-out (3pin)																																																																																																																
LAN	1x RJ45 Ethernet connector																																																																																																																
Audio	1x Audio microphone in, 1x Audio Line-out																																																																																																																
Browser	Internet Explorer 6.0 or above																																																																																																																
Application Software	VMS Application Software																																																																																																																
OS supported	Microsoft Windows 2000, XP, Vista, Windows 7																																																																																																																
	CGI commands to control camera Media SDK to handle streaming																																																																																																																
	Button																																																																																																																
Power	DC 12V																																																																																																																
Power Consumption	DC12V/ POE IR On : 7.8W / IR Off : 4.8W																																																																																																																
	98.59mm(Φ)x98.59mm(H)x254.27mm(L)																																																																																																																
	DC12V : 1251g / PoE : 1275g																																																																																																																
Operating temperature	-20°C~+50°C																																																																																																																
Storage temperature	-30°C~+60°C																																																																																																																
Humidity	0% ~ 95% non-condensing																																																																																																																
	CE, FCC Class A, RoHS, IP68																																																																																																																
	24 months																																																																																																																

Member of **ONVIF** **CE** **FC** **RoHS**

Dimension Diagram

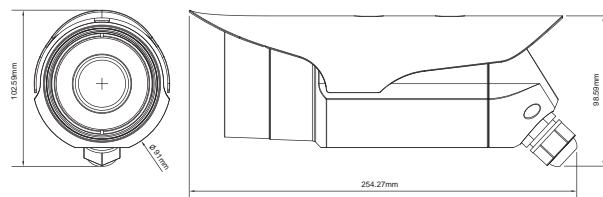

Distributed by:

3S PocketNet Technology Inc.

7F., No.5, Lane 16, Sec. 2, Sichuan Rd. Banqiao Dist.,
New Taipei City 22061, Taiwan (R.O.C.)
Tel: +886.2.8967.2909
Fax: +886.2.8967.2779